

KF-7330

> Self-Service Payment Kiosk



Features




- Multiple payment methods: Bill / Coin / Barcode
- Feature-rich devices for various field of application
- Stylish designed kiosk
- Easy maintenance via modular design

Applications

- Supermarket
- Stations
- Food and beverage
- Chain store

Highlights

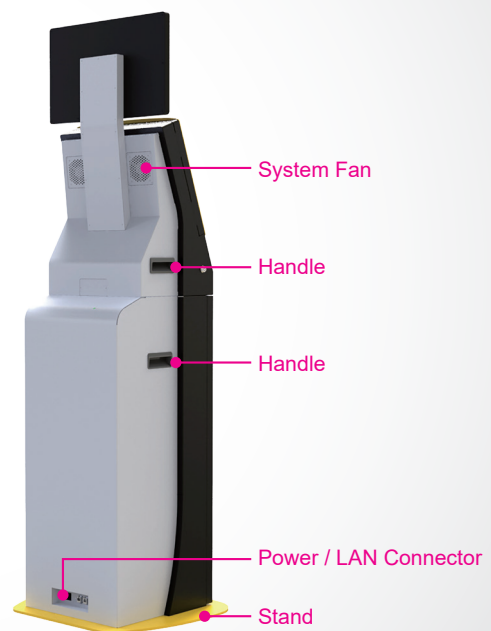

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

Specifications



System	CPU	Intel® Celeron® J1900 CPU
	Memory	1 x DDR3 SO-DIMM slot (default 4GB)
	HDD	1 x 2.5" SATA HDD (default 500G)
	Network	Gigabit 10/100/1000 Base-T Fast Ethernet
	Power Supply	100-240V available
	System Weight	100 kg
	Dimensions (W x H x D)	420 x 1474 x 405 mm
	O.S. Support	Windows 10 / Windows 7 / POSReady 7
Operating Display	LCD	17" TFT LCD
	Max. Resolution	1280 x 1024
	Brightness	350 cd/m ²
	Touchscreen	Projected capacitive touch
	Tilt Angle	0~68 degrees
Add-ons	2nd Display	18.5" 1366 x 768 wide screen
	RFID	Read/Write ISO 14443A Mifare
	Camera	2.1M fixed focus CCD camera module
	Barcode Scanner	1D: UPC-A, UPC-E, EAN-8, EAN-13, UCC/EAN-128, Code 39, Code 93, Interleaved 2 of 5, Codabar, MSI, GS1 Databar 2D: PDF417, MicroPDF417, DataMatrix, QR Code, MaxiCode
	Thermal Printer	3.13" thermal printer with 80 mm or 130 mm paper roll
	Bill Acceptor and Dispenser	Cash box: 500 (Recycle: 70_Mixed of all denomination) Cash box: 1000 (Recycle: 100 + 100_2 kind of denomination) Cash box: 500 (Recycle: 0)
	Coin Acceptor and Dispenser	NTD 10 / USD 25 / EUR 2 both around 800 coins
Environment	EMC & Safety	CE / FCC
	Operating Temp.	5°C~35°C
	Storage Temp.	-20°C~60°C
	Humidity	20%~85%

Dimensions

